
	<h1>TARAflow FLC-3</h1>
Material *	PMMA polished Beveled edges
Dimensions PMMA-block in mm	D 50 x W 80 x H 175
Hose connections	Inlet / Outlet: screwing 1/4" straight for 6/8 hose with O-ring Material PVDF nature
Insertion opening for sensor	1 1/4"-inside thread for amperometric sensor
Mounting-set for sensor	<ul style="list-style-type: none"> - 1 1/4"-screwing with knurl, material PVDF nature - O-ring-holder, material PVDF nature - Slide ring 30 x 25.5 x 4 mm, material PETP black - O-ring 30 x 2.6, material FPM - O-ring 25 x 2.5, material silicone
Flowrate regulation	Needle valve with knurl Material PVDF nature (Position: left side below installation opening of iPS)
Flow indicator	<ul style="list-style-type: none"> - Float: material PEEK red length 14.5 mm, Ø 7.0 mm up at a flow rate of approx. 45 l/h - Sealing plug M10, PVDF nature
Sample valve	Needle valve with knurl Material PVDF nature (Position: right side below outlet)
Application	<ul style="list-style-type: none"> - Pressure max. 80 mwc (8 bar) (permitted operating pressure of the sensor has to be applied!) - Temperature max. 70°C (permitted temperature range of the sensor has to be applied!)
Fixing	Recommendation: 2 screws M4 x 60 mm (pan head screw or hexagon socket head screw) (not provided!)
Storage	in original packing no limit at +5 ... +40 °C

* not resistant to organic solvents, e. g. alcohol

<p>Option 1: Flow control</p>	<ul style="list-style-type: none"> - By inductive proximity switch - Switching point at flow rate of approx. 45 l/h (principle NPN-transistor closer, further information see data sheet of flow control)
<p>Option 2: Flow indicator 15 l/h</p>	<ul style="list-style-type: none"> - Float: material PEEK nature length 14.5 mm, Ø 7.5 mm up at a flow rate of approx. 15 l/h - Not suitable in conjunction with cleaning device RV-1 for TARAsens AS-sensors 

(Subject to technical changes.)

Accessories

Component	Art. No.
Float PEEK nature, switching point approx. 15 l/h	11411
Flow control inductive proximity switch	12045


(Subject to technical changes.)

Spare Parts

Component	Art. No.
Float PEEK red, switching point approx. 45 l/h	11412
O-ring 30 x 2.6 FPM (Viton)	11902
O-Ring 25 x 2.5 silicone	11907
1 ¼"-screwing, PVDF nature	11507
O-ring-holder, PVDF nature	11807
Slide ring 30 x 25.5 x 4, PETP black	11509

(Subject to technical changes.)

Product overview

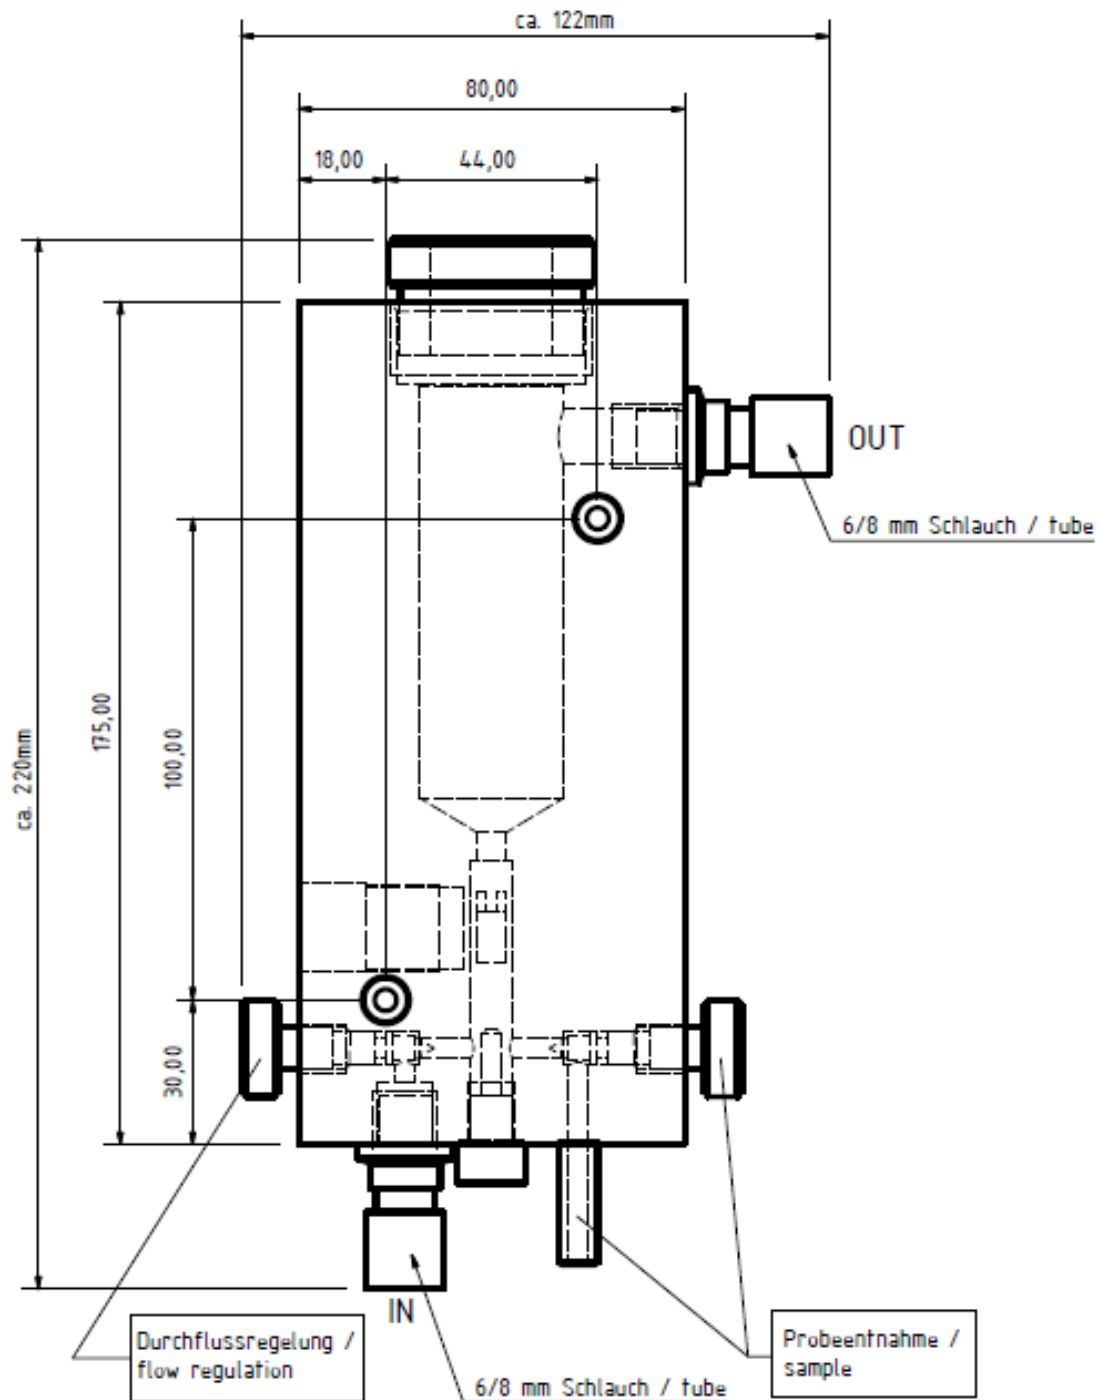

(Subject to technical changes.)