


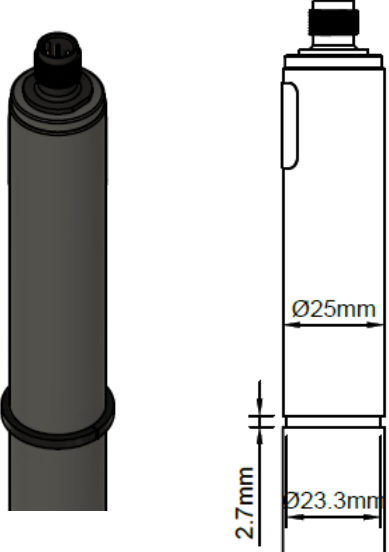
	<h1>TARAline BR1</h1>
indicator	bromine
Application	Drinking water, swimming pool water, service water, process water, sea water
bromine agents	Free bromine (HOBr) 1-Bromo-3-chloro-5.5-dimethyl-hydantoin (BCDMH)
Measuring system	membrane covered, amperometric potentiostatic 3-electrode system
electronic	Analog version: <ul style="list-style-type: none"> - voltage output - not galvanically isolated electronics - analog internal data processing - output signal: analog (analog-out/analog) Digital version: <ul style="list-style-type: none"> - electronic is completely galvanically isolated - digital internal data processing - output signal: analog (analog-out/digital) or digital (digital-out/digital) mA-version: <ul style="list-style-type: none"> - current output analog - not galvanically isolated electronics - output signal: analog (analog-out/analog)
Information about the measuring range	The actual slope of a sensor can vary production-related between 65% and 150% of the nominal slope Note: With a slope > 100% the measuring range is reduced accordingly. (Ex.: 150% slope → 67% of the specified measuring range)
Working temperature	Measuring water temperature: 0 ... +45 °C (no ice crystals in the measuring water)
	Ambient temperature: 0 ... +55 °C
Temperature compensation	Automatically, by an integrated temperature sensor Sudden temperature changes must be avoided
max. allowed working pressure	Operation without retaining ring: <ul style="list-style-type: none"> - 0.5 bar - no pressure impulses and/or vibrations
	Operation with retaining ring in TARAflow FLC: <ul style="list-style-type: none"> - 3 bar, - no pressure impulses and/or vibrations (see option 1)
Flow rate (Incoming flow velocity)	approx. 15-30 L/h (15 – 30 cm/s) in TARAflow FLC
pH-range	pH 6.5 – pH 9.5, highly reduced dependence on pH – value (see diagram “relative dependence on pH”)


	<h1>TARAline BR1</h1>	
Run-in time	First start-up approx. 2 h	
Response time	T ₉₀ : approx. 2 min	
Zero point adjustment	Not necessary	
calibration	At the device, by analytical determination of the bromine concentration Recommendation depending on bromine agent: - Free bromine DPD1 - method - BCDMH DPD4 - method	
Cross sensitivities/ interferences	Cl ₂ : is also measured ClO ₂ : is also measured O ₃ : is also measured Corrosion inhibitors can lead to measuring errors. Stabilisers for water hardness can lead to measuring errors.	
Absence of the disinfectant	Max. 24 h	
Connection	mV version: 5-pole M12, plug-on flange Modbus version: 5-pole M12, plug-on flange 4-20 mA version: 2-pole terminal or 5-pole M12, plug-on flange	
max. length of sensor cable (depending on internal signal processing)	analog	< 30 m
	digital	> 30 m are permissible Maximum cable length depends on application
Protection type	5-pole M12 plug-on flange: IP68 2-pole terminal with mA-hood: IP65	
material	Microporous hydrophilic membrane, PVC, PEEK ,stainless steel 1.4571	
Size	diameter: approx. 25 mm Length: mV version approx. 190 mm (analog signal processing) approx.. 205 mm (digital signal processing) Modbus version approx. 205 mm 4-20 mA version approx. 220 mm (2-pole-terminal) approx. 190 mm (5-pole-M12)	
Transport	+5 ... +50 °C (Sensor, electrolyte, membrane cap)	

	<h1>TARAline BR1</h1>	
<p>storage</p>	<p>Sensor:</p>	<p>dry and without electrolyte no limit at +5 ... +40 °C</p>
	<p>Electrolyte:</p>	<p>in original bottle protected from sunlight at +5 ... +35 °C min. 1 year or until the specified EXP-Date</p>
	<p>Membrane cap:</p>	<p>in original packing no limit at +5 ... +40 °C (used membrane caps can not be stored)</p>
<p>maintenance</p>	<p>Regularly control of the measuring signal, min. once a week The following information highly depends on the water quality: Change of the membrane cap: once a year Change of the electrolyte: every 3 - 6 months</p>	
	<p>EMC tested RoHS compliant</p>	

<p>Option 1: Retaining ring</p>	<ul style="list-style-type: none"> - When operating with pressures >0.5 bar in TARAline FLC - Dimensions retaining ring 29 x 23.4 x 2.5 mm, slitted, PETP - Different positions for groove selectable (on request) 	
--	--	--

Technical Data


1. BR1 (analog output, analog internal signal processing)

	Measuring range in ppm	Resolution in ppm	Output Output resistance	Nominal slope (at pH 7.2) in mV/ppm	Voltage supply	Galvanic isolation required in the measuring device/controller *	Connection
BR1H-M12	0.005...2.000	0.001	analog 0...-2000 mV	-1000	±5 - ±15 VDC 10 mA	yes	5-pole M12 plug-on flange Function of wires: PIN1: measuring signal PIN2: +U PIN3: -U PIN4: signal GND PIN5: n. c.
BR1N-M12	0.05...20.00	0.01	1 kΩ	-100			

* for further information see brochure 'Technical information // galvanic isolation' (in the download area of our website www.reiss-gmbh.com)

(Subject to technical changes!)


2. BR1 (analog output, digital internal signal processing)
analog-out / digital

	Measuring range in ppm	Resolution in ppm	Output Output resistance	Nominal slope (at pH 7.2) in mV/ppm	Power supply	Galvanic isolation required in the measuring device/controller *	Connection
BR1H-An-M12	0.005...2.000	0.001	analog 0...-2 V (max. -2.5 V)	-1000	9-30 VDC approx. 7-30 mA	no	5-pole M12 plug-on flange Function of wires: PIN1: measuring signal PIN2: +U PIN3: power GND PIN4: signal GND PIN5: n. c.
BR1N-An-M12	0.05...20.00	0.01	1 kΩ	-100			
BR1H-Ap-M12	0.005...2.000	0.001	analog 0...+2 V (max. +2.5 V)	+1000			
BR1N-Ap-M12	0.05...20.00	0.01	1 kΩ	+100			

* for further information see brochure 'Technical information // galvanic isolation' (in the download area of our website www.reiss-gmbh.com)

(Subject to technical changes!)

3. BR1 (digital output, digital internal signal processing)


	Measuring range in ppm	Resolution in ppm	Output Output resistance	Power supply	Galvanic isolation required in the measuring device/controller *	Connection
BR1H-M0c	0.005...2.000	0.001	Modbus RTU There are no terminating resistors in the sensor.	9-30 VDC approx. 7-30 mA	no	5-pole M12 plug-on flange Function of wires: PIN1: reserved PIN2: +U PIN3: power GND PIN4: RS485B PIN5: RS485A
BR1N-M0c	0.05...20.00	0.01				

* for further information see brochure 'Technical information // galvanic isolation' (in the download area of our website www.reiss-gmbh.com)

(Subject to technical changes!)

4. BR1 4-20 mA (analog output, analog internal signal processing)


4.1 Electrical connection: 2 pole terminal clamp

	Measuring range in ppm	Resolution in ppm	Output Output resistance	Nominal slope (at pH 7.2) in mA/ppm	Voltage supply	Galvanic isolation required in the measuring device/controller *	Connection
BR1MA-2	0.005 ... 2.000	0.001	analog 4...20 mA uncalibrated	8.0	12...30 VDC $R_L = 50\Omega (12V) \dots 900\Omega (30V)$	yes	2-pole terminal (2 x 1 mm ²) Recommended: Round cable Ø 4 mm 2 x 0.34 mm ²
BR1MA-5	0.05 ... 5.00	0.01		3.2			
BR1MA-10	0.05 ... 10.00	0.01		1.6			
BR1MA-20	0.05 ... 20.00	0.01		0.8			

* for further information see brochure 'Technical information // galvanic isolation' (in the download area of our website www.reiss-gmbh.com)

(Subject to technical changes!)

4.2 Electrical connection: 5 pole M12 plug-on flange

	Measuring range in ppm	Resolution in ppm	Output Output resistance	Nominal slope (at pH 7.2) in mA/ppm	Voltage supply	Galvanic isolation required in the measuring device/controller *	Connection
BR1MA-2-M12	0.005 ... 2.000	0.001	analog 4...20 mA uncalibrated	8.0	12...30 VDC $R_L = 50\Omega (12V) \dots 900\Omega (30V)$	yes	5-pole M12 plug-on flange Function of wires: PIN1: n. c. PIN2: +U PIN3: -U PIN4: n c. PIN5: n. c.
BR1MA-5-M12	0.05 ... 5.00	0.01		3.2			
BR1MA-10-M12	0.05 ... 10.00	0.01		1.6			
BR1MA-20-M12	0.05 ... 20.00	0.01		0.8			

* for further information see brochure 'Technical information // galvanic isolation' (in the download area of our website www.reiss-gmbh.com)

(Subject to technical changes!)

Spare Parts

Type	Membrane cap	Electrolyte	Emery	O-ring
All BR1	M48.2 Art. No. 11047	ECP1.4/GEL, 100 ml Art. No. 11006.1	S1 Art. No. 11908	14 x 1.8 NBR Art. No. 11806

(Subject to technical changes!)

relative dependence on pH

Temperature: 25°C / Flow rate: 30 l/h

