


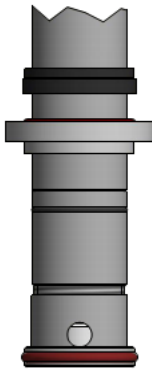
	<h1>TARAsens</h1> <h2>AS2 / AS3</h2>
<p>indicator</p>	<p>AS...-CL: Free chlorine</p> <p>AS...-CD: Chlorine dioxide</p>
<p>Application</p>	<p>drinking water cold, hot until max. 70 °C</p>
<p>Chlorination agents</p>	<p>inorganic chlorine compounds: NaOCl (=sodium hypochlorite), Ca(OCl)₂, chlorine gas, electrolytically generated chlorine</p>
<p>appropriate chlorine dioxide production methods</p>	<p>e. g.:</p> <ul style="list-style-type: none"> - Acid/Chlorite-method - Chlorine/Chlorite-method
<p>Measuring system</p>	<p>amperometric potentiostatic 3-electrode system</p>
<p>Electronic</p>	<p>Analog version:</p> <ul style="list-style-type: none"> - voltage output - not galvanically isolated electronics - analog internal data processing - output signal: analog (analog-out/analog) <p>Digital version:</p> <ul style="list-style-type: none"> - electronic is completely galvanically isolated - digital internal data processing - output signal: analog (analog-out/digital) or digital (digital-out/digital) <p>mA-version:</p> <ul style="list-style-type: none"> - current output analog - not galvanically isolated electronics - output signal: analog (analog-out/analog)
<p>Information about the measuring range</p>	<p>The actual slope of a sensor can vary production-related between 65% and 150% of the nominal slope</p> <p>Note: With a slope > 100% the measuring range is reduced accordingly. (Ex.: 150% slope → 67% of the specified measuring range)</p>
<p>Working temperature</p>	<p>Measuring water temperature: AS2...: 0 ... +50 °C AS3...: 0 ... +70 °C (no ice crystals in the measuring water)</p> <p>Ambient temperature: 0 ... +55 °C</p>
<p>Temperature compensation</p>	<p>Automatically, by an integrated temperature sensor Response time t₉₀ = approx. 10 min. Max. change in temperature: 30 °C per hour, sudden temperature changes must be avoided</p>


	<h1>TARAsens AS2 / AS3</h1>
<p>Max. allowed working pressure</p>	<p>Operation without retaining ring:</p> <ul style="list-style-type: none"> - 0.5 bar - no pressure impulses and/or vibrations <p>Operation with retaining ring in TARAflow FLC:</p> <ul style="list-style-type: none"> - 8 bar, - no pressure impulses and/or vibrations
<p>Cleaning equipment RV1</p>	<p>Use is recommended for AS...-CL (chlorine) Advantages: - significant extension of maintenance intervals - considerably more stable signal over long term</p>
<p>Flow chamber</p>	<p>TARAflow FLC (separate data sheet available)</p>
<p>Flow rate (Incoming flow velocity)</p>	<p>Without RV1: min. 15 l/h (33 cm/s), in TARAflow FLC With RV1: 45-90 l/h (99 – 198 cm/s), in TARAflow FLC</p>
<p>pH-range</p>	<p>AS...-CL: pH 5 – pH 9, pay attention to the dissociation equilibrium HOCL (see diagram “AS-sensors, relative dependence on pH”) AS...-CD: pH 1 – pH 12 or the beginning of decomposition of chlorine dioxide at/over pH 12</p>
<p>Run-in time</p>	<p>First start-up approx. 1 h up to 2 days, depending on the water quality</p>
<p>Response time</p>	<p>T₉₀: approx. 30 sec.</p>
<p>Zero point adjustment</p>	<p>Not necessary</p>
<p>calibration</p>	<p>Chlorine: At the device, by analytical determination, DPD-1-Method Chlorine dioxide: At the device, by analytical determination, (without chlorine) DPD-1-Method</p>
<p>Interferences</p>	<p>AS...-CL: Ozone, chlorine dioxide, chlorite are measured AS...-CD: Chlorine, chlorite are measured with less than 2 % of their value</p>
<p>Absence of the disinfectant</p>	<p>Max. 24 h</p>
<p>Connection</p>	<p>mV version: 5-pole M12, plug-on flange Modbus version: 5-pole M12, plug-on flange 4-20 mA version: 2-pole terminal or 5-pole M12, plug-on flange</p>

	<h1>TARAsens AS2 / AS3</h1>	
max. length of sensor cable (depending on internal signal processing)	analog	< 30 m
	digital	> 30 m are permissible Maximum cable length depends on application.
Protection type	5-pole M12 plug-on flange: 2-pole terminal with mA-hood:	IP68 IP65
material	AS2: PVC-U	
	AS3: PEEK	
Size	diameter: approx. 25 mm Length: mV version approx. 190 mm (analog signal processing) approx.. 205 mm (digital signal processing) Modbus version approx. 205 mm 4-20 mA version approx. 220 mm (2-pole-terminal) approx. 190 mm (5-pole-M12)	
Transport	+5 ... +50 °C (Sensor, electrolyte)	
storage	Sensor: - wet up to one year at +5 ... +35 °C (filled with electrolyte and electrolyte-filled protection-cap) - only for AS2: dry no limit at +5 ... +40 °C (without electrolyte)	
	Electrolyte: in original bottle protected from sunlight at >+5 - <+35 °C min. 1 year or until specified EXP-Date	
maintenance	Regularly control of the measuring signal, min. once a week The following specifications depend on the water quality: – Cleaning of the gold electrodes: without RV1 every 4 – 12 weeks with RV1 every 6-12 months – Change of the electrolyte: every 3 - 6 months	
	Option: Factory service/maintenance (return the sensor to the manufacturer)	
	EMC tested RoHS compliant	

Option	<p>Cleaning equipment RV1-M</p> <ul style="list-style-type: none"> - direct installation on the sensor - approaching flow to the sensor through RV1 - cleaning effect of RV1 is moderate, i. e. weak deposits on the electrodes will be removed, e. g. weak rust films - for a correct and proper operation of sensor with cleaning equipment RV1 flow chamber FLC-3 has to be used!! - flow rate min. 45 l/h - Sensor can be upgraded at any time <p><u>Advice:</u></p> <ul style="list-style-type: none"> - Using with AS...-CL: => slope is approx. 3 times higher (see diagram "AS-Chlorine Sensor with and without RV1") - Using with AS...-CD: => slope is approx. 2 times higher 	 <p style="font-size: small;">Sicherungsring und Gleitring retaining ring and slide ring</p> <p style="font-size: small;">O-Ring Halterung O-ring-holder</p> <p style="font-size: small;">Hülse / hull</p> <p style="font-size: small;">Reinigungsvorrichtung RV1 cleaning equipment RV1</p>
---------------	--	---

(Subject to technical changes.)

Accessories

Component	Art. No.
<p>Cleaning equipment RV1-M</p> <ul style="list-style-type: none"> • Cleaning equipment RV1 • 2 bags with each 3 cleaning balls • emery S3 	 <p style="font-size: small;">12112</p>


(Subject to technical changes.)

Spare Parts

Type	Hull	Electrolyte	Emery	O-ring
All AS2	Hull AS2 Art. No. 11103	EAS1/GEL, 50 ml Art. No. 11905	S3 Art. No. 11904	20 x 1.5 silicone Art. no. 11803
All AS3	Hull AS3 Art. No. 11019			

(Subject to technical changes.)


Technical Data
A) Chlorine
1. AS – CL (analog output, analog internal signal processing)

	Measuring range in ppm		Resolution in ppm	Output Output resistance	Nominal slope (at pH 7.2) in mV/ppm		Voltage supply	Galvanic isolation required in the measuring device/controller *	Connection
	Without RV1	with RV1			Without RV1	with RV1			
AS2H-CL-M12	0.005... 2.000	0.005... 0.700	0.001	analog 0...-2000 mV	-1000	-3000	±5 - ±15 VDC 10 mA	yes	5-pole M12 plug-on flange Function of wires: PIN1: measuring signal PIN2: +U PIN3: -U PIN4: signal GND PIN5: n. c.
AS2N-CL-M12	0.03... 20.00	0.03... 7.00	0.01	1 kΩ	-100	-300			5-pole M12 plug-on flange Function of wires: PIN1: measuring signal PIN2: +U PIN3: power GND PIN4: signal GND PIN5: n. c.
AS2Up-CL-M12	0.03... 20.00	0.03... 7.00	0.01	analog 0...+2000 mV 1 kΩ	+100	+300	10 - 30 VDC 10 mA		5-pole M12 plug-on flange Function of wires: PIN1: measuring signal PIN2: +U PIN3: power GND PIN4: signal GND PIN5: n. c.
AS3H-CL-M12	0.005... 2.000	0.005... 0.700	0.001	analog 0...-2000 mV	-1000	-3000	±5 - ±15 VDC 10 mA		5-pole M12 plug-on flange Function of wires: PIN1: measuring signal PIN2: +U PIN3: -U PIN4: signal GND PIN5: n. c.
AS3N-CL-M12	0.03... 20.00	0.03... 7.00	0.01	1 kΩ	-100	-300			5-pole M12 plug-on flange Function of wires: PIN1: measuring signal PIN2: +U PIN3: power GND PIN4: signal GND PIN5: n. c.
AS3Up-CL-M12	0.03... 20.00	0.03... 7.00	0.01	analog 0...+2000 mV 1 kΩ	+100	+300	10 - 30 VDC 10 mA		5-pole M12 plug-on flange Function of wires: PIN1: measuring signal PIN2: +U PIN3: power GND PIN4: signal GND PIN5: n. c.

* for further information see brochure 'Technical information // galvanic isolation' (in the download area of our website www.reiss-gmbh.com)

(Subject to technical changes!)


2. AS – CL (analog output, digital internal signal processing)
 analog-out / digital

	Measuring range		Resolution	Output Output resistance	Nominal slope (at pH 7.2)		Power supply	Galvanic isolation required in the measuring device/controller *	Connection	
	in ppm				in mV/ppm					
	Without RV1	with RV1	in ppm		Without RV1	with RV1				
AS2H-CL-An-M12	0.005... 2.000	0.005... 0.700	0.001	analog 0...-2 V (max. -2.5 V)	-1000	-3000	9-30 VDC approx. 7-30 mA	no	5-pole M12 plug-on flange Function of wires: PIN1: measuring signal PIN2: +U PIN3: power GND PIN4: signal GND PIN5: n. c.	
AS2N-CL-An-M12	0.03... 20.00	0.03... 7.00	0.01		-100	-300				
AS3H-CL-An-M12	0.005... 2.000	0.005... 0.700	0.001	1 kΩ	-1000	-3000				
AS3N-CL-An-M12	0.03... 20.00	0.03... 7.00	0.01	-100	-300					
AS2H-CL-Ap-M12	0.005... 2.000	0.005... 0.700	0.001	analog 0...+2 V (max. +2.5 V)	-1000	-3000				
AS2N-CL-Ap-M12	0.03... 20.00	0.03... 7.00	0.01		-100	-300				
AS3H-CL-Ap-M12	0.005... 2.000	0.005... 0.700	0.001		1 kΩ	-1000				-3000
AS3N-CL-Ap-M12	0.03... 20.00	0.03... 7.00	0.01		-100	-300				

* for further information see brochure 'Technical information // galvanic isolation' (in the download area of our website www.reiss-gmbh.com)

(Subject to technical changes!)

3. AS – CL (digital output, analog internal signal processing)


	Measuring range		Resolution	Output Output resistance	Power supply	Galvanic isolation required in the measuring device/controller *	Connection
	in ppm	Without RV1	with RV1				
AS2H-CL-M0c	0.005... 2.000	0.005... 0.700	0.001	Modbus RTU There are no terminating resistors in the sensor.	9-30 VDC approx. 7-30 mA	no	5-pole M12 plug-on flange Function of wires: PIN1: reserved PIN2: +U PIN3: power GND PIN4: RS485B PIN5: RS485A
AS2N-CL-M0c	0.03... 20.00	0.03... 7.00	0.01				
AS3H-CL-M0c	0.005... 2.000	0.005... 0.700	0.001				
AS3N-CL-M0c	0.03... 20.00	0.03... 7.00	0.01				

* for further information see brochure 'Technical information // galvanic isolation' (in the download area of our website www.reiss-gmbh.com)

(Subject to technical changes!)

4. AS – CL 4-20 mA (analog output, analog internal signal processing)


4.1 Electrical connection: 2 pole terminal clamp

	Measuring range		Resolution	Output Output resistance	Nominal slope (at pH 7.2)		Voltage supply	Galvanic isolation required in the measuring device/controller *	Connection
	in ppm				in mA/ppm				
	Without RV1	with RV1	in ppm		Without RV1	with RV1			
AS2MA1-CL	0.003... 1.000	0.003... 0.400	0.001	4...20 mA uncalibrated	16.0	48.0	12...30 VDC R _L 50Ω...R _L 900Ω	yes	2-pole terminal (2 x 1 mm ²) Recommended: Round cable ∅ 4 mm 2 x 0.34 mm ²
AS2MA2-CL	0.003... 2.000	0.003... 0.700	0.001		8.0	24.0			
AS2MA5-CL	0.03... 5.00	0.03... 1.70	0.01		3.2	9.6			
AS2MA10-CL	0.03... 10.00	0.03... 4.00	0.01		1.6	4.8			
AS2MA20-CL	0.03... 20.00	0.03... 7.00	0.01		0.8	2.4			
AS3MA1-CL	0.003... 1.000	0.003... 0.400	0.001		16.0	48.0			
AS3MA2-CL	0.003... 2.000	0.003... 0.700	0.001		8.0	24.0			
AS3MA5-CL	0.03... 5.00	0.03... 1.70	0.01		3.2	9.6			
AS3MA10-CL	0.03... 10.00	0.03... 4.00	0.01		1.6	4.8			
AS3MA20-CL	0.03... 20.00	0.03... 7.00	0.01		0.8	2.4			

* for further information see brochure 'Technical information // galvanic isolation' (in the download area of our website www.reiss-gmbh.com)

(Subject to technical changes!)


4.2 Electrical connection: 5 pole M12 plug-on flange

	Measuring range		Resolution	Output Output resistance	Nominal slope (at pH 7.2)		Voltage supply	Galvanic isolation required in the measuring device/controller *	Connection
	in ppm				in ppm	in mA/ppm			
	Without RV1	with RV1	Without RV1	with RV1					
AS2MA1-CL-M12	0.003... 1.000	0.003... 0.400	0.001	4...20 mA uncalibrated	16.0	48.0	12...30 VDC R _L 50Ω...R _L 900Ω	yes	5-pole M12 plug-on flange Function of wires: PIN1: n. c. PIN2: +U PIN3: -U PIN4: n. c. PIN5: n. c.
AS2MA2-CL-M12	0.003... 2.000	0.003... 0.700	0.001		8.0	24.0			
AS2MA5-CL-M12	0.03... 5.00	0.03... 1.70	0.01		3.2	9.6			
AS2MA10-CL-M12	0.03... 10.00	0.03... 4.00	0.01		1.6	4.8			
AS2MA20-CL-M12	0.03... 20.00	0.03... 7.00	0.01		0.8	2.4			
AS3MA1-CL-M12	0.003... 1.000	0.003... 0.400	0.001		16.0	48.0			
AS3MA2-CL-M12	0.003... 2.000	0.003... 0.700	0.001		8.0	24.0			
AS3MA5-CL-M12	0.03... 5.00	0.03... 1.70	0.01		3.2	9.6			
AS3MA10-CL-M12	0.03... 10.00	0.03... 4.00	0.01		1.6	4.8			
AS3MA20-CL-M12	0.03... 20.00	0.03... 7.00	0.01		0.8	2.4			

* for further information see brochure 'Technical information // galvanic isolation' (in the download area of our website www.reiss-gmbh.com)

(Subject to technical changes!)


B) Chlorine Dioxide
1. AS – CD (analog output, analog internal signal processing)

	Measuring range		Resolution	Output Output resistance	Nominal slope		Voltage supply	Galvanic isolation required in the measuring device/controller *	Connection	
	in ppm				in ppm	in mV/ppm				
	Without RV1	with RV1			Without RV1	with RV1				
AS2H-CD-M12	0.005...2.000	0.005...1.000	0.001	analog 0...-2000 mV	-1000	-2000	±5 - ±15 VDC 10 mA	yes	5-pole M12 plug-on flange Function of wires: PIN1: measuring signal PIN2: +U PIN3: -U PIN4: signal GND PIN5: n. c.	
AS2N-CD-M12	0.03...20.00	0.03...10.00	0.01	1 kΩ	-100	-200			10 - 30 VDC 10 mA	5-pole M12 plug-on flange Function of wires: PIN1: measuring signal PIN2: +U PIN3: power GND PIN4: signal GND PIN5: n. c.
AS2Up-CD-M12	0.03...20.00	0.03...10.00	0.01	analog 0...+2000 mV 1 kΩ	+100	+200	±5 - ±15 VDC 10 mA		5-pole M12 plug-on flange Function of wires: PIN1: measuring signal PIN2: +U PIN3: -U PIN4: signal GND PIN5: n. c.	
AS3H-CD-M12	0.005... 2.000	0.005... 1.000	0.001	analog 0...-2000 mV	-1000	-2000	±5 - ±15 VDC 10 mA		yes	5-pole M12 plug-on flange Function of wires: PIN1: measuring signal PIN2: +U PIN3: -U PIN4: signal GND PIN5: n. c.
AS3N-CD-M12	0.03... 20.00	0.03... 10.00	0.01	1 kΩ	-100	-200				10 - 30 VDC 10 mA
AS3Up-CD-M12	0.03... 20.00	0.03... 10.00	0.01	analog 0...+2000 mV 1 kΩ	+100	+200	±5 - ±15 VDC 10 mA			5-pole M12 plug-on flange Function of wires: PIN1: measuring signal PIN2: +U PIN3: -U PIN4: signal GND PIN5: n. c.

* for further information see brochure 'Technical information // galvanic isolation' (in the download area of our website www.reiss-gmbh.com)

(Subject to technical changes!)


2. AS – CD (analog output, digital internal signal processing)
 analog-out / digital

	Measuring range		Resolution	Output Output resistance	Nominal Slope		Power supply	Galvanic isolation required in the measuring device/controller *	Connection		
	in ppm		in ppm		in mV/ppm						
	Without RV1	with RV1			Without RV1	with RV1					
AS2H-CD-An-M12	0.005... 2.000	0.005... 1.000	0.001	analog 0...-2 V (max. -2.5 V) 1 kΩ	-1000	-2000	9-30 VDC approx. 7-30 mA	no	5-pole M12 plug-on flange Function of wires: PIN1: measuring signal PIN2: +U PIN3: power GND PIN4: signal GND PIN5: n. c.		
AS2N-CD-An-M12	0.03... 20.00	0.03... 10.00	0.01		-100	-200					
AS3H-CD-An-M12	0.005... 2.000	0.005... 1.000	0.001		-1000	-2000					
AS3N-CD-An-M12	0.03... 20.00	0.03... 10.00	0.01		-100	-200					
AS2H-CD-AP-M12	0.005... 2.000	0.005... 1.000	0.001	analog 0...+2 V (max. +2.5 V) 1 kΩ	+1000	+200					
AS2N-CD-AP-M12	0.03... 20.00	0.03... 10.00	0.01		+100	+200					
AS3H-CD-AP-M12	0.005... 2.000	0.005... 1.000	0.001		+1000	+2000					
AS3N-CD-AP-M12	0.03... 20.00	0.03... 10.00	0.01		+100	+200					

* for further information see brochure 'Technical information // galvanic isolation' (in the download area of our website www.reiss-gmbh.com)

(Subject to technical changes!)

3. AS – CD (digital output, analog internal signal processing)


	Measuring range		Resolution	Output Output resistance	Power supply	Galvanic isolation required in the measuring device/controller *	Connection
	in ppm Without RV1	with RV1	in ppm				
AS2H-CD-M0c	0.005... 2.000	0.005... 1.000	0.001	Modbus RTU There are no terminating resistors in the sensor.	9-30 VDC approx. 7-30 mA	no	5-pole M12 plug-on flange Function of wires: PIN1: reserved PIN2: +U PIN3: power GND PIN4: RS485B PIN5: RS485A
AS2N-CD-M0c	0.03... 20.00	0.03... 10.00	0.01				
AS3H-CD-M0c	0.005... 2.000	0.005... 1.000	0.001				
AS3N-CD-M0c	0.03... 20.00	0.03... 10.00	0.01				

* for further information see brochure 'Technical information // galvanic isolation' (in the download area of our website www.reiss-gmbh.com)

(Subject to technical changes!)

4. AS – CD 4-20 mA (analog output, analog internal signal processing)


4.1 Electrical connection: 2 pole terminal clamp

	Measuring range		Resolution	Output Output resistance	Nominal slope		Voltage supply	Galvanic isolation required in the measuring device/controller *	Connection
	in ppm				in mA/ppm				
	Without RV1	with RV1	in ppm		Without RV1	with RV1			
AS2MA1-CD	0.003... 1.000	0.003... 0.500	0.001	4...20 mA unkalibriert	16.0	32.0	12...30 VDC R _L 50Ω...R _L 900Ω	yes	2-pole terminal (2 x 1 mm ²) Recommended: Round cable ∅ 4 mm 2 x 0.34 mm ²
AS2MA2-CD	0.003... 2.000	0.003... 1.000	0.001		8.0	16.0			
AS2MA5-CD	0.03... 5.00	0.03... 2.50	0.01		3.2	6.4			
AS3MA1-CD	0.003... 1.000	0.003... 0.500	0.001		16.0	32.0			
AS3MA2-CD	0.003... 2.000	0.003... 1.000	0.001		8.0	16.0			
AS3MA5-CD	0.03... 5.00	0.03... 2.50	0.01		3.2	6.4			
AS3MA20-CD	0,03...20,00	0,03... 10,00	0,001		0,8	1,6			

* for further information see brochure 'Technical information // galvanic isolation' (in the download area of our website www.reiss-gmbh.com)



(Subject to technical changes!)


4.2 Electrical connection: 5 pole M12 plug-on flange

	Measuring range in ppm		Resolution in ppm	Output Output resistance	Nominal slope in mA/ppm		Voltage supply	Galvanic isolation required in the measuring device/controller *	Connection
	Without RV1	with RV1			Without RV1	with RV1			
AS2MA1-CD-M12	0.003... 1.000	0.003... 0.500	0.001	4...20 mA unkalibriert	16.0	32.0	12...30 VDC R _L 50Ω...R _L 900Ω	yes	5-pole M12 plug-on flange Function of wires: PIN1: n. c. PIN2: +U PIN3: -U PIN4: n c. PIN5: n. c.
AS2MA2-CD-M12	0.003... 2.000	0.003... 1.000	0.001		8.0	16.0			
AS2MA5-CD-M12	0.03... 5.00	0.03... 2.50	0.01		3.2	6.4			
AS3MA1-CD-M12	0.003... 1.000	0.003... 0.500	0.001		16.0	32.0			
AS3MA2-CD-M12	0.003... 2.000	0.003... 1.000	0.001		8.0	16.0			
AS3MA5-CD-M12	0.03... 5.00	0.03... 2.50	0.01		3.2	6.4			
AS3MA20-CD-M12	0,03... 20,00	0,03... 10,00	0,001		0,8	1,6			

* for further information see brochure 'Technical information // galvanic isolation' (in the download area of our website www.reiss-gmbh.com)

(Subject to technical changes!)

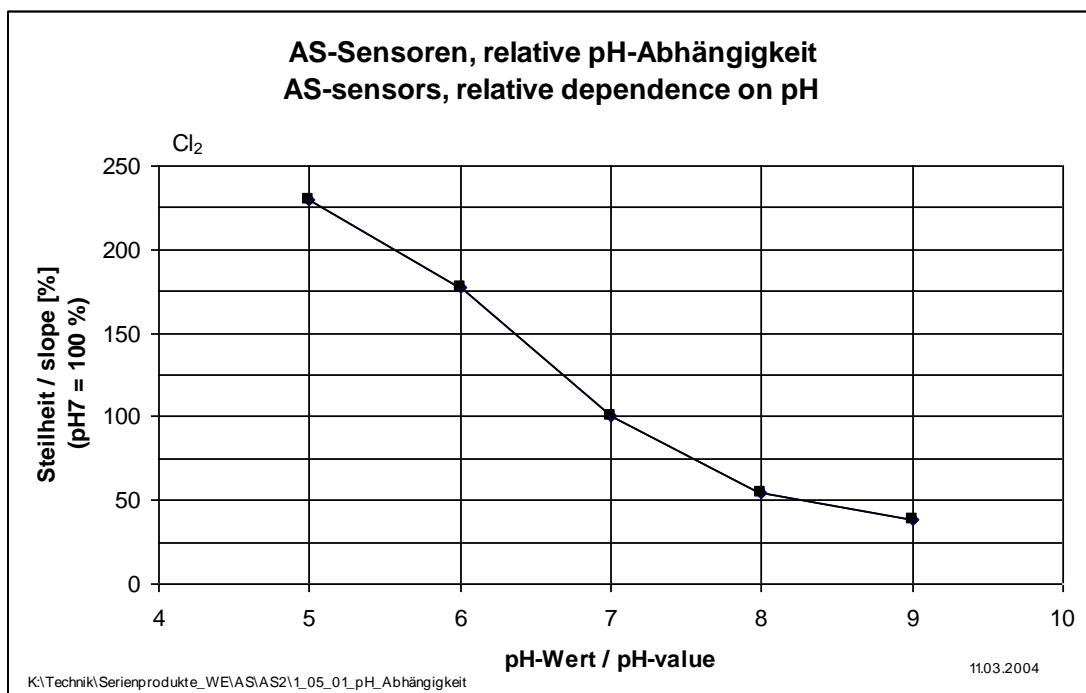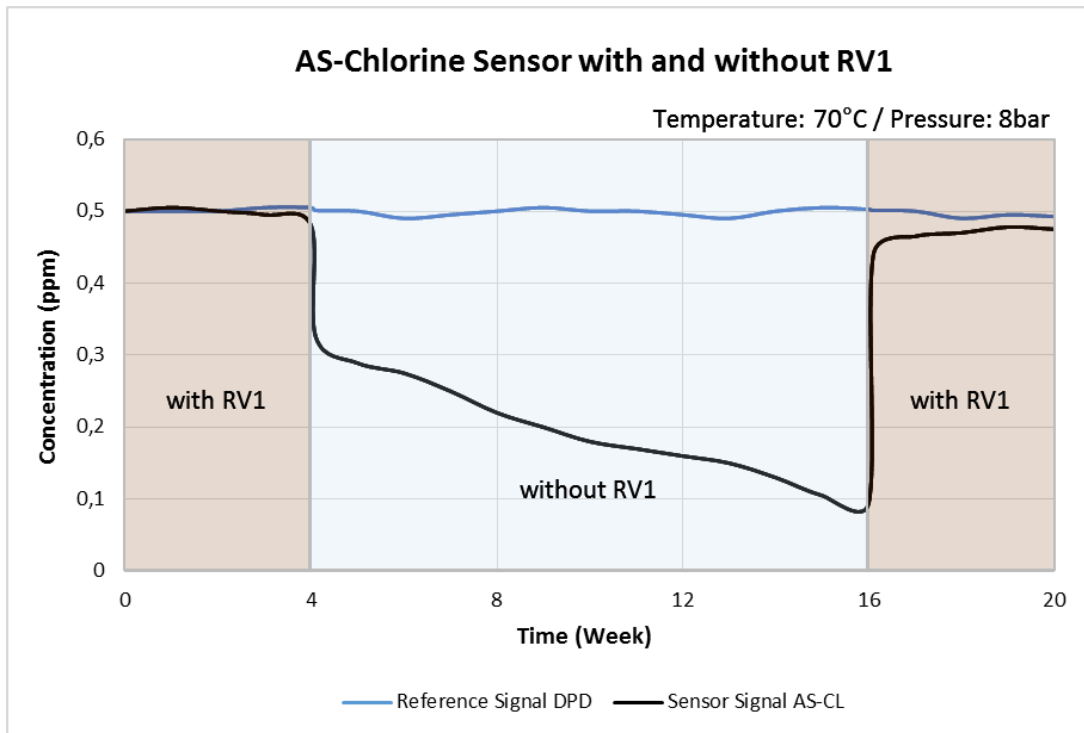

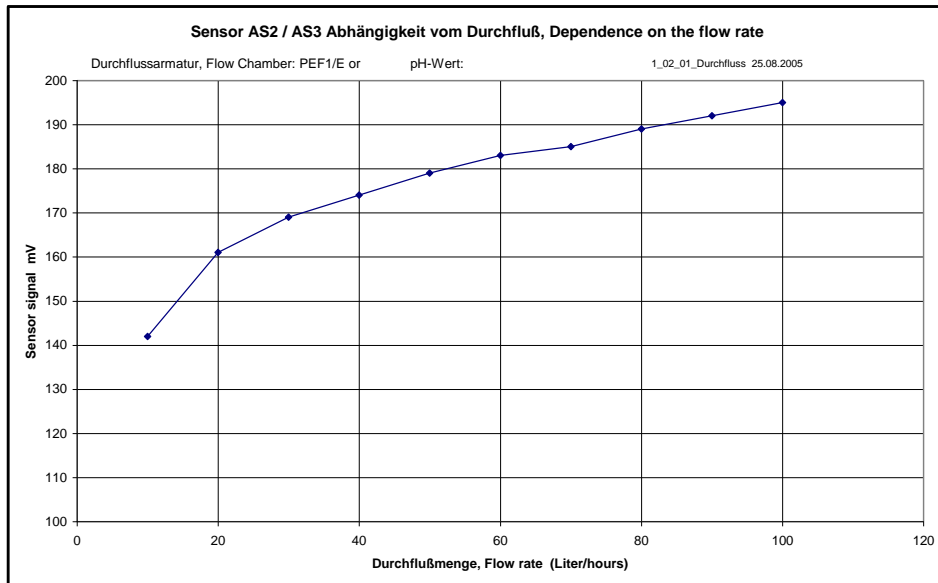

(Subject to technical changes.)