


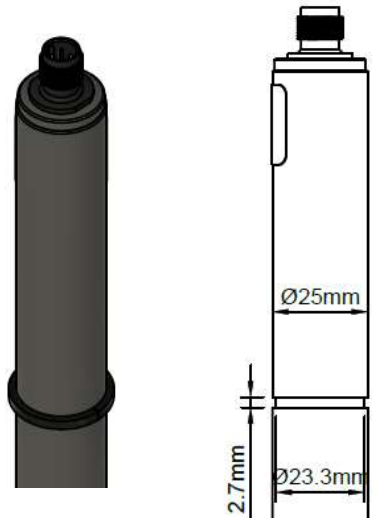
	<h1>TARAtec CH10</h1>
indicator	Free chlorine, pH dependent
Application	especially for high chlorine concentrations, process water pH-value must be constant. The membrane system is mechanical resistant. The membrane system is highly resistant to surfactants (tensides).
Chlorination agents	inorganic chlorine compounds: NaOCl (=sodium hypochlorite), Ca(OCl) ₂ , chlorine gas, chlorine electrolysis with membrane cell
Measuring system	Membrane covered, amperometric 2-electrode system with integrated electronics
Electronic	<p>Analog version:</p> <ul style="list-style-type: none"> - voltage output - not galvanically isolated electronics - analog internal data processing <p>Digital version:</p> <ul style="list-style-type: none"> - output signal: analog (analog-out/analog) - electronic is completely galvanically isolated - digital internal data processing - output signal: analog (analog-out/digital) or digital (digital-out/digital) <p>mA-version:</p> <ul style="list-style-type: none"> - current output analog - not galvanically isolated electronics - output signal: analog (analog-out/analog)
Information about the measuring range	<p>The actual slope of a sensor can vary production-related between 65% and 150% of the nominal slope</p> <p>Note: With a slope > 100% the measuring range is reduced accordingly. (Ex.: 150% slope → 67% of the specified measuring range)</p>
Working temperature	Measuring water temperature: 0 ... +45 °C (no ice crystals in the measuring water)
	Ambient temperature: 0 ... +55 °C
Temperature compensation	Automatically, by an integrated temperature sensor Response time t_{90} = approx. 8 min. Max. change in temperature: 5 °C per hour, sudden temperature changes must be avoided
Max. allowed working pressure	Operation without retaining ring: <ul style="list-style-type: none"> - 0.5 bar - no pressure impulses and/or vibrations
	Operation with retaining ring in TARAflow FLC: <ul style="list-style-type: none"> - 1 bar, - no pressure impulses and/or vibrations (see option 1)


	<h1>TARAttec CH10</h1>													
Flow rate (Incoming flow velocity)	approx. 15-30 l/h (15 – 30 cm/s) in TARAflow FLC, small flow rate dependence is given													
pH-range	pH 5 – pH 8, pay attention to the dissociation equilibrium HOCL (see diagram "Slope of TARAttec CH10 versus pH")													
Run-in time	First start-up approx. 11 h													
Response time	T ₉₀ : approx. 8 min.													
Zero point adjustment	Not necessary													
calibration	At the device, by analytical chlorine determination <ul style="list-style-type: none"> - DPD-1 (up to 10 ppm) - iodometry (up to 200 ppm with photometer) - iodometry (up to 2000 ppm titration) 													
interferences	ClO ₂ O ₃ Peracetic acid													
Absence of the disinfectant	Max. 24 h													
Connection	<table style="width: 100%; border: none;"> <tr> <td style="width: 33%; border: none;">mV version:</td> <td style="border: none;">5-pole M12, plug-on flange</td> </tr> <tr> <td style="border: none;">Modbus version:</td> <td style="border: none;">5-pole M12, plug-on flange</td> </tr> <tr> <td style="border: none;">4-20 mA version:</td> <td style="border: none;">2-pole terminal</td> </tr> <tr> <td style="border: none;"></td> <td style="border: none;">or</td> </tr> <tr> <td style="border: none;"></td> <td style="border: none;">5-pole M12, plug-on flange</td> </tr> </table>		mV version:	5-pole M12, plug-on flange	Modbus version:	5-pole M12, plug-on flange	4-20 mA version:	2-pole terminal		or		5-pole M12, plug-on flange		
mV version:	5-pole M12, plug-on flange													
Modbus version:	5-pole M12, plug-on flange													
4-20 mA version:	2-pole terminal													
	or													
	5-pole M12, plug-on flange													
max. length of sensor cable (depending on internal signal processing)	analog	< 30 m												
	digital	> 30 m are permissible Maximum cable length depends on application												
Protection type	<table style="width: 100%; border: none;"> <tr> <td style="width: 60%; border: none;">5-pole M12 plug-on flange:</td> <td style="border: none;">IP68</td> </tr> <tr> <td style="border: none;">2-pole terminal with mA-hood:</td> <td style="border: none;">IP65</td> </tr> </table>		5-pole M12 plug-on flange:	IP68	2-pole terminal with mA-hood:	IP65								
5-pole M12 plug-on flange:	IP68													
2-pole terminal with mA-hood:	IP65													
material	Elastomer membrane, PVC-U, PEEK													
Size	<table style="width: 100%; border: none;"> <tr> <td style="width: 30%; border: none;">diameter:</td> <td style="border: none;">approx. 25 mm</td> </tr> <tr> <td style="border: none;">Length: mV version</td> <td style="border: none;">approx. 190 mm (analog signal processing)</td> </tr> <tr> <td style="border: none;"></td> <td style="border: none;">approx.. 205 mm (digital signal processing)</td> </tr> <tr> <td style="border: none;">Modbus version</td> <td style="border: none;">approx. 205 mm</td> </tr> <tr> <td style="border: none;">4-20 mA version</td> <td style="border: none;">approx. 220 mm (2-pole-terminal)</td> </tr> <tr> <td style="border: none;"></td> <td style="border: none;">approx. 190 mm (5-pole-M12)</td> </tr> </table>		diameter:	approx. 25 mm	Length: mV version	approx. 190 mm (analog signal processing)		approx.. 205 mm (digital signal processing)	Modbus version	approx. 205 mm	4-20 mA version	approx. 220 mm (2-pole-terminal)		approx. 190 mm (5-pole-M12)
diameter:	approx. 25 mm													
Length: mV version	approx. 190 mm (analog signal processing)													
	approx.. 205 mm (digital signal processing)													
Modbus version	approx. 205 mm													
4-20 mA version	approx. 220 mm (2-pole-terminal)													
	approx. 190 mm (5-pole-M12)													
Transport	+5 ... +50 °C (Sensor, electrolyte, membrane cap)													

	<h1>TARAtec CH10</h1>
<p>storage</p>	<p>Sensor: dry and without electrolyte no limit at +5 ... +40 °C</p> <p>Electrolyte: in original bottle protected from sunlight at +5 ... +35 °C min. 1 year or until specified EXP-Date</p> <p>Membrane cap: in original packing no limit at +5 ... +40 °C (used membrane caps can not be stored)</p>
<p>maintenance</p>	<p>Regularly control of the measuring signal, min. once a week The following specifications highly depend on the water quality: Change of the membrane cap: once a year Change of the electrolyte: approx. every 3 months</p>
	<p>EMC tested RoHS compliant</p>

<p>Option 1: Retaining ring</p>	<ul style="list-style-type: none"> - When operating with pressures >0.5 bar in TARAflow FLC - Dimensions retaining ring 29 x 23.4 x 2.5 mm, slitted, PETP - Different positions for groove selectable (on request) 	
--	--	--

Technical Data

1. CH10 (Analog output, analog internal signal processing)


	Measuring range (at pH 7.2)	Resolution (at pH 7.2)	Output Output resistance	Nominal slope (at pH 7.2)	Voltage supply	Galvanic isolation required in the measuring device/controller **	Connection
CH10-2000-M12	20...2000 ppm	1 ppm	0...-2000 mV	-1 mV/ppm	±5 - ±15 VDC 10 mA	yes	5-pole M12 plug-on flange Function of wires: PIN1: measuring signal PIN2: +U PIN3: -U PIN4: signal GND PIN5: n. c.
CH10-20%-M12	0.05%...0.2% * (500...2000 ppm *)	100 ppm	1 kΩ	-100 mV/% (-0.01mV/ppm)			

* concentration tested and approved up to 0.2% (2000 ppm)

** for further information see brochure 'Technical information // galvanic isolation' (in the download area of our website www.reiss-gmbh.com)

(Subject to technical changes!)

2. CH10 (analog output, digital signal processing)
 analog-out / digital


	Measuring range (at pH 7.2)	Resolution (at pH 7.2)	Output Output resistance	Nominal slope (at pH 7.2)	Power supply	Galvanic isolation required in the measuring device/controller **	Connection
CH10-2000-An-M12	20... 2000 ppm	1 ppm	analog 0...-2 V (max. -2.5 V)	-1 mV/ppm	9-30 VDC approx. 7-30 mA	no	5-pole M12 plug-on flange Function of wires: PIN1: measuring signal PIN2: +U PIN3: power GND PIN4: signal GND PIN5: n. c.
CH10-20%-An-M12	0.05... 0.2 % * (500... 2000 ppm *)	100 ppm	1 k Ω	-100 mV/% (-0.01 mV/ppm)			
CH10-2000-Ap-M12	20... 2000 ppm	1 ppm	analog 0...+2 V (max. +2.5 V)	+1 mV/ppm			
CH10-20%-Ap-M12	0.05... 0.2 % * (500... 2000 ppm *)	100 ppm	1 k Ω	+100 mV/% (+0.01 mV/ppm)			

* concentration tested and approved up to 0.2% (2000 ppm)

** for further information see brochure 'Technical information // galvanic isolation' (in the download area of our website www.reiss-gmbh.com)

(Subject to technical changes!)

3. CH10 (digital output, digital signal processing)

	Measuring range (at pH 7.2)	Resolution (at pH 7.2)	Output Output resistance	Power supply	Galvanic isolation required in the measuring device/controller **	Connection
CH10-2000-M0c	20... 2000 ppm	1 ppm	Modbus RTU	9-30 VDC	no	5-pole M12 plug-on flange Function of wires: PIN1: reserved PIN2: +U PIN3: power GND PIN4: RS485B PIN5: RS485A
CH10-20%-M0c	0.05... 0.2 % * (500... 2000 ppm *)	100 ppm	There are no terminating resistors in the sensor.	approx. 7-30 mA		


* concentration tested and approved up to 0.2% (2000 ppm)

** for further information see brochure 'Technical information // galvanic isolation' (in the download area of our website www.reiss-gmbh.com)

(Subject to technical changes!)

4. CH10 4-20 mA (analog output, analog internal signal processing)

4.1 Electrical connection: 2 pole terminal clamp


	Measuring range (at pH 7.2)	Resolution (at pH 7.2)	Output Output resistance	Nominal slope (at pH 7.2)	Voltage supply	Galvanic isolation required in the measuring device/controller **	Connection
CH10MA-2000	20... 2000 ppm	1 ppm	4...20 mA	0.008 mA/ppm	12...30 VDC	yes	2-pole terminal (2 x 1 mm ²)
CH10MA-20%	0.05... 0.2% * (500... 2000 ppm *)	100 ppm	uncalibrated	0.8 mA/% (0.00008 mA/ppm)	R _L 50Ω...R _L 900Ω		Recommended: Round cable ∅ 4 mm 2 x 0.34 mm ²

* concentration tested and approved up to 0.2% (2000 ppm)

** for further information see brochure 'Technical information // galvanic isolation' (in the download area of our website www.reiss-gmbh.com)

(Subject to technical changes!)

4.2 Electrical connection: 5 pole M12 plug-on flange

	Measuring range (at pH 7.2)	Resolution (at pH 7.2)	Output Output resistance	Nominal slope (at pH 7.2)	Voltage supply	Galvanic isolation required in the measuring device/controller **	Connection
CH10MA-2000-M12	20... 2000 ppm	1 ppm	4...20 mA	0.008 mA/ppm	12...30 VDC	yes	5-pole M12 plug-on flange Function of wires: PIN1: n. c. PIN2: +U PIN3: -U PIN4: n c. PIN5: n. c.
CH10MA-20%-M12	0.05... 0.2% * (500... 2000 ppm *)	100 ppm	uncalibrated	0.8 mA/% (0.00008 mA/ppm)	R _L 50Ω...R _L 900Ω		

* concentration tested and approved up to 0.2% (2000 ppm)

** for further information see brochure 'Technical information // galvanic isolation' (in the download area of our website www.reiss-gmbh.com)

(Subject to technical changes!)

Spare Parts

Type	Membrane cap	Electrolyte	Emery	O-ring
All CH10	M10.1D-S with G-holder Art. no. 11054	ECH10/W, 100 ml Art. no. 11055	S2 Art. no. 11906	20 x 1.5 silicone Art. no. 11803

(Subject to technical changes!)

Slope of TARAtec CH10 versus pH

Temperature: 25°C / Flow rate: 40 L/h

